

eSSL

Technology development company

- Auto Push Data Service on Internet/GPRS
- Inbuilt 5 Hrs Battery Backup
- WiFi/GPRS/CDMA enabled



X 990

Standalone IP based - Fingerprint Time Attendance / Access Control Terminal

Technical Specification

Users: 3000 Fingerprints

Transaction: 1,00,000 Logs

CPU: 32bit Microprocessor

Sensor: 500 dpi Optical Sensor

Identification speed: <=2 Sec

FAR: <=0.0001%

FRR: <=1%

Card Reader: Inbuilt Prox card reader

Wiegand I/O: 26 bit (optional)

Battery: Inbuilt 5 hrs Battery backup

Communication: RS232, RS485, TCP/IP


USB-HOST & Client 2.0 Port

Operation temperature: 0°C - 45°C

Operation Humidity: 20-80%

Power: 12V DC, 400mA

Optional Functions: Web server, WiFi, GPRS, CDMA, Mifare/HID card reader

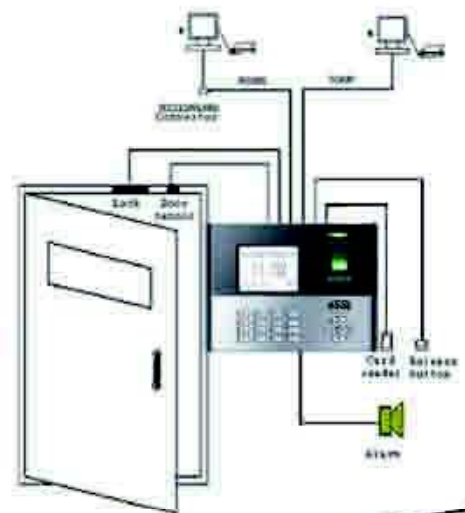

Security at Fingertips